

## ANALOGUE INDOOR CLOCK

# FLEX LN

*Its integrated sound insulation makes the FLEX LN (low noise) particularly suitable for locations where the lowest possible noise emission is a priority, such as operations theaters, libraries, recording studios and prayer rooms.*



# 5 STEPS TO YOUR FLEX LN


To make sure your Flex LN meets all your requirements, you can assemble the components individually. Naturally, our experts will be happy to help.

## 1. How big does your Flex LN need to be?

### SIZE

The Flex LN is available in two dial diameters. The reading distance varies depending on the dial, lighting, viewing angle, etc. These are the options:

Ø	READING DISTANCE
30cm	25-30m
40cm	35-45m

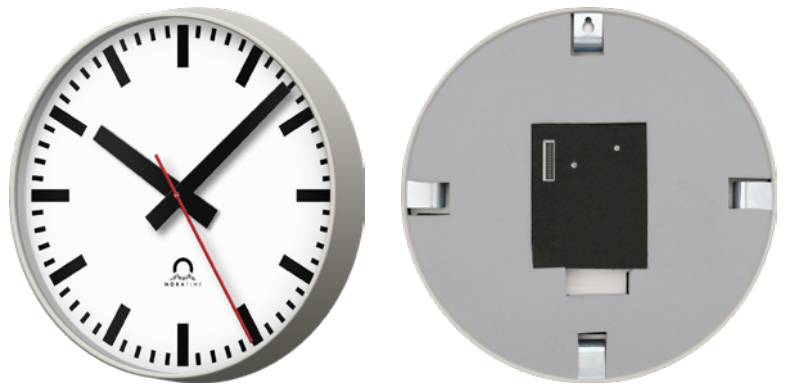

## 2. Pick your time code variant:


### TIME CODE

Code	Time code	Ø	Power supply	Hands	Movement	Max. power consumption	Accuracy (typically)	Loss of signal
<b>MOBALINE SELF-SETTING: MXX</b>								
M00	MOBALine	25-40	MOBALine	h/m	SAM 40	< 6mA @ 17VAC (0.1W)	< +/- 100ms/d	12:00 position after 24 hours
M21	MOBALine	25-40	MOBALine	h/m/s	SEM 40			
<b>NTP (LAN) SELF-SETTING: NXX</b>								
N20	NTP	25-40	PoE	h/m	SAN 40	PoEclass 1: <1.9W	< +/-50 ms/d	12:00 position after 24 hours
N21	NTP	25-40	PoE	h/m/s	SEN 40			
<b>POLARIZED PULSES: IXX</b>								
I30	Sec. pulse	25-40	24-60V	h/m/s	SEI 40	-	-	Standstill

## 3. Which dial design do you like?

### DIAL

The Flex LN offers the following standard designs. For custom variants and logo prints, please contact our customer service.

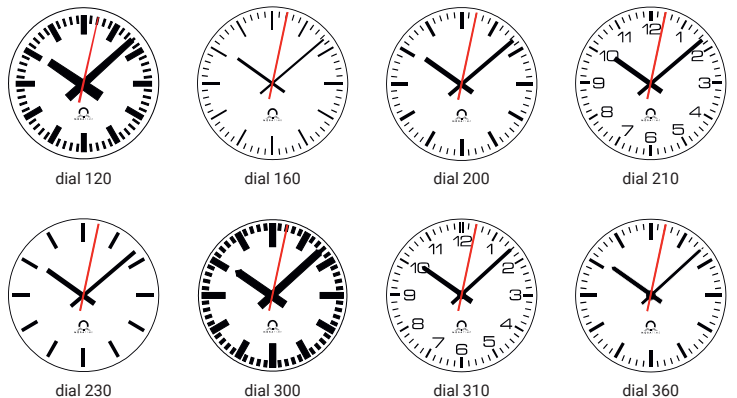

# 4. Which type of glass is the right one?

## GLASS TYPE

Depending on the intended use and budget, two glass options are available.

### Mineral glass (code 0)

The high-quality, durable standard glass holds up against aggressive cleaning agents, and is therefore ideal for medical applications.

### Plexiglas Resist (code 3)

The nearly indestructible Plexiglas is shatterproof, and therefore ideal for use in the food industry.

# 5. Which housing type do you need?

## HOUSING TYPE

Extremely stable, extremely low-noise, extremely hygienic. Each housing offers different benefits. Which one fits your intended use?

### FLEX Standard low-noise (code 05)

The standard housing made from aluminium (RAL 9002) is the classic solution for most applications (e.g. offices).

### Stainless steel V2A low-noise (code 06)

The stainless steel housing is used in applications with the highest hygienic requirements, such as hospitals.

## YOUR FLEX LN IS COMPLETE

You can now order your Flex LN and calculate the corresponding code. Enter the abbreviation for each component of your choice in the bright field and find your Flex LN code. It serves as the order code or as the foundation for further steps.

<b>My Flex LN clock</b>		FL0.
<b>1. Size</b>	Ø cm	<input type="text"/>
<b>Shape</b>	Code	<input type="text" value="R1"/>
<b>2. Time code</b>	Code	<input type="text"/>
<b>3. Dial</b>	Code	<input type="text"/>
<b>4. Glass type</b>	Code	<input type="text"/>
<b>5. Housing type</b>	Code	<input type="text"/>
<b>Sequence number</b>	Code	<input type="text" value="0000"/>

### Example order code



	1.	2.	3.	4.	5.
<b>FL</b>	0.	30.	R1.	M21.	120.
<b>Flex</b>	no illumination <sup>1</sup>	Ø 30cm	round, single-sided <sup>1</sup>	movement SEM 40	dial 120
				mineral glass	standard housing (low noise)
					sequence number <sup>2</sup>
					05.
					0000

<sup>1</sup> standard, cannot be changed

<sup>2</sup> The sequence number denotes special versions (e.g. clocks with a special dial). When ordering, please indicate the sequence number with 0000 (standard version); we will adapt this for any special version. Special versions can be reordered at any time stating the sequence number.

## Standards

Depending on the movement used in your Flex LN clock, the following standards apply:

MOVEMENT(S)	STANDARDS
SAM 40 SEM 40 SAN 40 SEN 40	2011/65/EU / 2014/30/EU / 2014/35/EU / 2016/797/EU EN 50121-4 / EN 60950-1 / EN 61000-6-2 / EN 61000-6-3
SEI 40	2011/65/EU / 2014/30/EU / 2014/35/EU / EN 61000-6-2 EN 61000-6-3

All Flex LN clocks are compliant with CE, RoHS and REACH.

# SOUND INSULATION


Specially developed in collaboration with the Institute for Radio Technology (IRT) Munich, the FLEX LN is ideal for locations that require minimal noise emission such as:

- Radio and TV stations
- Recording studios
- Operating theaters
- Quiet rooms
- Libraries


The noise emitted by the FLEX LN is comparable with our previous low-noise clock, the E1G. You can find detailed information about the FLEX clock series in the brochure LE-800853 FLEX.



Operating theater

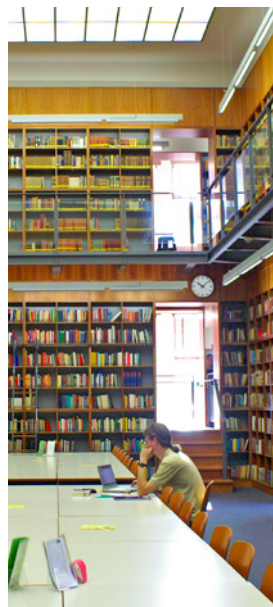

Library

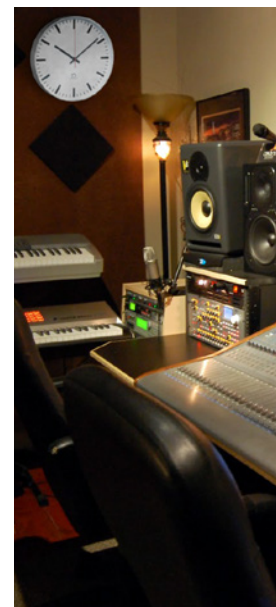


Recording studio

# TECHNICAL DATA

TECHNICAL DATA	FLEX LN
Operating conditions	-30 to +70 °C (0 to 95% relative humidity, non-condensing)
Degree of protection	IP 30

COMPARISON TO FLEX	FLEX	FLEX LN
Ø	25-80cm	30-40cm
Noise emission (at 12 dB(A) low-noise level))	At 0.5 m (near field): 28 dB(A) At 2 m (diffuse field): 18.5 dB(A)	At 0.5 m (near field): 19dB(A) At 2 m (diffuse field): 14 dB(A)
Weight (with V2A, approx. +0.3 kg)	30 cm: approx. 1 kg 40 cm: approx. 1.7 kg	30 cm: approx. 1.4 kg 40 cm: approx. 2.3 kg



Ø	A	B	Weight
30	317	303	1.4
40	417	403	2.3

All dimensions in mm and weights in kg.

*Do you have any questions?  
We are happy to help.*

Moser-Baer AG | Spitalstrasse 7 | CH-3454 Sumiswald  
Tel. +41 34 432 46 46 | Fax +41 34 432 46 99  
info@mobatime.com | www.mobatime.com